

User manual Tuya smart

Product: Smart WiFi Irrigation Controller



060 319 2282 or WhatsApp

072 604 4306 or WhatsApp

henractabletech.sales@outlook.com



Wiring diagram

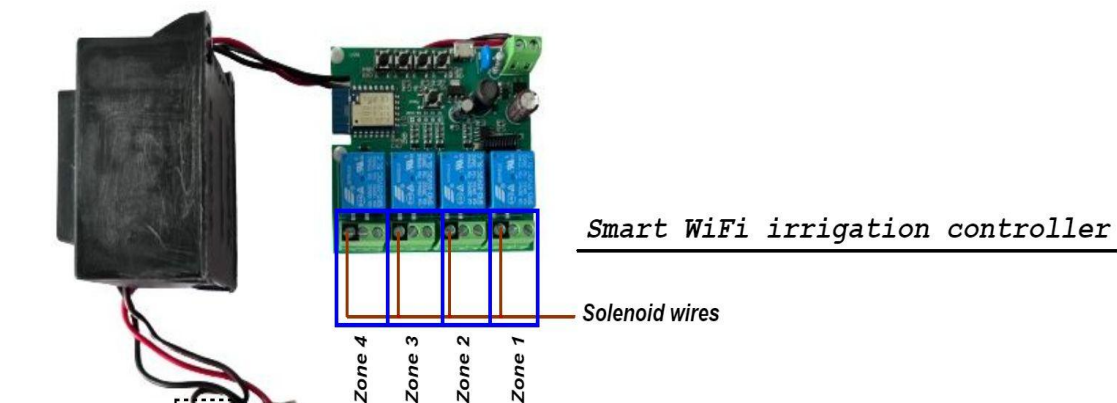


Note

- To connect the power supply to the controller, connect the:
 - * Red/brown wire to the red wire of the controller.
 - * Black/blue wire to the black wire of the controller.
- To connect the solenoid to the controller, connect the one side of the solenoid wire to the terminal block with brown color wire, and the other wire to the relay board with the black strip.
- All smart irrigation controller comes with a spare 0.25 fuse.
- Most solenoid valves does not have a polarity when installing it, however refer to the manufactures.
- To connect your valves to an 8 & 12 zone controller, remove the top relay boards.


Step 1

Before connecting your device to the app, power it on & see if there is a red LED flashing from the smart relay board, if there is no flashing LED, press & hold the reset button on the relay board for 5 seconds. If you have an 8 zone, you have to press the two relay boards reset button together. The same goes with the 12 zones, press all three reset buttons of the relay board together.

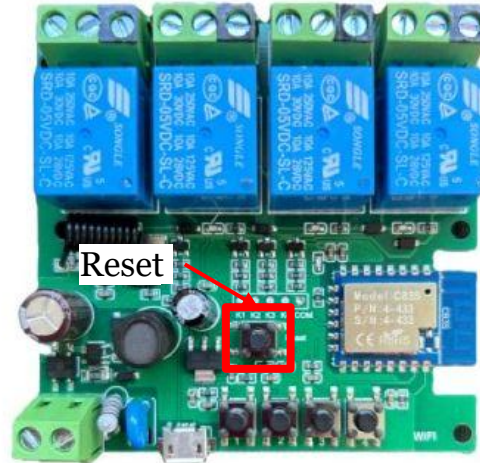


Step 2

Once you've confirmed a flashing red light, go onto Smart Life or Tuya Smart app & tap on the '+' icon to add your device.

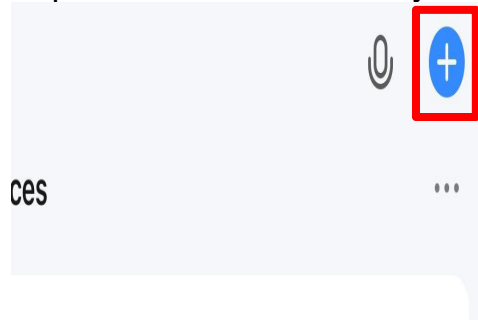


Step 3

Once you've tapped on the add device, the Smart irrigation controller should automatically be picked up as '**433-3**'. Tap on the blue add button. For the 8 zones, you should pick up 2 '**433-3**', & for the 12 zones, you should pick up three '**433-3**'.

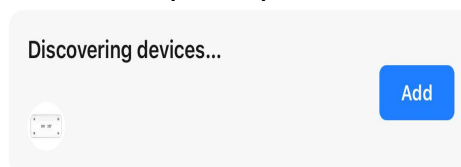


Step 4

When you've tapped the blue add button, it will ask you to enter your WiFi network to which the device will be connected. You can skip steps 5 - 8 if you are successful.

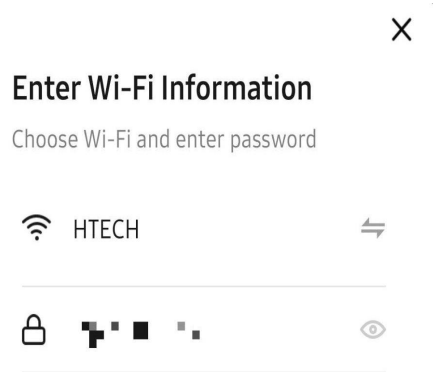

Step 5

If your mobile device does not support Bluetooth, scroll down to the smart devices Tuya offers. Go to the electrical section & find Switch (WiFi).

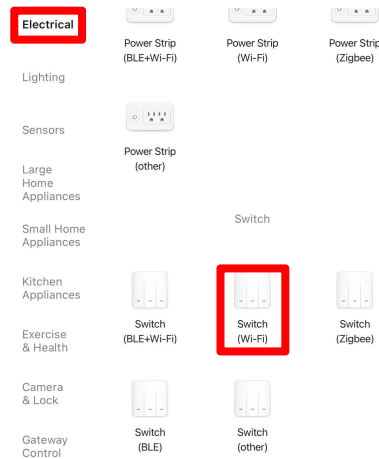

Step 6

Confirm that the indicator light is rapidly blinking & proceed to the next following page which will pair the device to your Smart Home.



Press and hold the RESET button for 5 seconds until the indicator blinks (subject to the user manual).

The device will pair with your application, the device will be added within 2 min, If failed, check your WiFi details & confirm the red LED is flashing rapidly.

Step 7

Connecting Device
Keep the network stable.



01:56

When the smart device pops up in pairing mode, tap on add, & confirm the WiFi network to which the device will be connected. To learn how to rename the device & switches [\[click here\]](#).

Step 8

Enter Wi-Fi Information

Choose Wi-Fi and enter password

📶 HTECH ⇌

🔒 ■■■■ 👁

Step 9

Once your device has been added, it is time to test it. On your phone, go into your device & tap on any of the relay switches, once you have tapped on the switches, you should see one of the relay switches red light has turned on. After that go ahead & press the relay switch button on the relay board, you should see on your phone that the relay switch is turned off.

Warranty

WARRANTY POLICY for REPLACEMENTS

Should any product 'fail' within the first 3 months of purchase the product may be returned to us for either a repair or replacement. From your nearest PostNet branch country request the standard 'PostNet to PostNet' service.

For more details regarding our return policy [\[click here\]](#).

IMPORTANT! Warranty void if:

- 1) Goods are not in original packaging & are complete with all original components.
- 2) Goods show signs of damage due to abusive usage.
- 3) Goods show signs of physical alteration.
- 4) Goods show signs of physical damage.
- 5) Goods show signs of tampering.
- 6) Signs of power spike damage.
- 7) Signs of water damage (besides waterproof products).